



Mounted sprayers
DELTIS 2





Table of contents

- | | | |
|---------------------------------------|--|---|
| 04 Remarkable design | 12 High-performance booms from 15 to 24 m | 20 AUTOSPRAY: for variable rate precision spraying |
| 06 OPTILIFT parallelogram | 14 BOOM ASSIST automatic ground tracking | 22 Sprayer rinsing made easy |
| 07 Filling made safe & easy | 16 Control your boom | 24 KUHN ISOBUS solutions |
| 08 Simple, both inside and out | 17 Carry more volume | 26 Accessories |
| 10 Save time, spray faster | 18 Continuous circulation: precision from start to finish | 27 Technical data |
-

DELTIS 2

Mounted sprayers

UNCOMPROMISING SIMPLICITY

TODAY, SPRAYING UNDER OPTIMUM CONDITIONS HAS BECOME A REAL CHALLENGE. YOU CAN'T CONTROL WEATHER CONDITIONS LIKE YOU CAN THE PERFORMANCE OF YOUR MACHINE. KUHN HAS DESIGNED DELTIS 2 MOUNTED SPRAYERS TO ENSURE MAXIMUM PRODUCTIVITY WITHOUT THE FUSS.



OPTIMIZED

The DELTIS 2 sprayer features a simple design, making it easy to use. Load transfer is optimized thanks to its L-shaped chassis with an integrated automatic hitch.

COMFORT

Whether on the road or in the field, the boom is supported by the OPTILIFT suspended parallelogram, ensuring maximum comfort and reliability.

SIMPLICITY

The DELTIS 2 sprayer is intuitive and safe to use, with the OPTIFILLER flexible induction bowl and just two valves at the operator's station!

REMARKABLE DESIGN

The sprayer design ensures operating performance. KUHN has designed the DELTIS 2 mounted sprayer with all the components to ensure easy operation. Everything has been engineered to make spraying easier, including the chassis, the location of the tanks, the filling station, the multi-purpose valves and the chemical induction bowl.



Optimal load distribution

The L-shaped chassis design and OPTILIFT parallelogram offer one of the lowest unladen weights on the market in this category (1050 kg for a DELTIS 1302 - 21 m), with a centre of gravity close to the tractor. The sprayer hitching system is integrated within the machine's outline, keeping the sprayer near the tractor and allowing for optimal load transfer.



Automatic hitching

The EASY-HITCH automatic hitching system provides quick, convenient and safe hitching. The operator can maintain enough space for connecting the systems before backing up and locking the sprayer in place. The triangle is automatically locked on the sprayer and secured, with no risk of it becoming unhitched during operations.



Well-positioned tanks

The specific shape of the main tank on DELTIS 2 sprayers facilitates emptying even on steep terrain: the deep sump and significant incline of the tank's surface reduces the residual volumes. The position of the rinsing tank opposite the sump maintains the balance of the assembly throughout the spraying operation.



Details designed for you

The DELTIS 2 mounted sprayer features many convenient accessories installed as standard:

- An indicator so you can keep an eye on the height of your boom,
- A protected pressure gauge so you can monitor the pressure.

Tank volume display

With the DELTIS 2 sprayer, you have excellent visibility over the gauges, both from the operator's station and the tractor cab. The rinsing tank gauge also allows you to easily break down the rinsing operations into various steps.



OPTILIFT: A PARALLELOGRAM JUST LIKE ON THE BIGGER MODELS!

The OPTILIFT suspended parallelogram is the key component of the DELTIS 2 sprayer, considerably reducing the weight of the machine and also protecting the boom. The boom is more stable and the working and transport speeds can be increased.



Large working height range

The OPTILIFT parallelogram can raise the boom to around 2.50 m when hitched to the tractor, for work in tall crops.



Suspension on the road and in the field

Combined with its boom supports and nitrogen accumulator, the OPTILIFT parallelogram provides extreme flexibility on the road and in the field. The boom is protected and driving comfort is enhanced thanks to the parallelogram's integrated hydropneumatic suspension.



Increased reliability

This technical solution features only rotational movements of the arms around the articulations, with no friction or sliding. The self-lubricating rings require little maintenance and reliability is improved.

FILLING MADE SAFE & EASY

Precision application starts with filling, a strategic step. Accurate volumes, reduced filling times, limited contact with plant protection products... These are all very important points to bear in mind. Whether you're filling the main tank, the rinsing tank or incorporating product, these operations can be centralised on the operating panel, which offers an easy-to-use, sleek design.



Personal protective equipment

Before handling plant protection products, you need to be properly equipped so that you can work safely near a sprayer. KUHN has fitted DELTIS 2 sprayers with a 40-litre watertight compartment as standard, where you can easily store and access your personal protective equipment.

INNOVATIVE

OPTIFILLER induction bowl

Made from a durable, resistant material, this flexible induction bowl is seamlessly integrated into the sprayer frame. Kuhn's patented OPTIFILLER induction bowl has a volume of 42 litres when unfolded.

The wide opening makes it easy and convenient for the operator to insert and rinse large containers. The induction bowl comes with a flush gun for safe and quick rinsing. The products are incorporated with a foot control, so you don't need to bend down.



DELTIS 2 1002 | 1302 | 1502

SIMPLE, BOTH INSIDE AND OUTSIDE

The operator's station is a key component of your sprayer. With two main valves, the total number of filling and rinsing operations is considerably reduced, and so is the risk of error! A simple operator station also means a shorter circuit for less dead volume to make the rinsing stages easier.

- 1 Manual main delivery valve
- 2 Suction valve



MANUSET

Perfect control of your product preparations. With a very limited number of valves, you can control all the sprayer functions on the operator panel.

- 1 Manual main delivery valve
- 2 Motorised suction valves




DILUSET+

Eliminate errors thanks to this assisted system that allows you to stop filling automatically, monitor the volume of spraying solution in the tank using an electronic gauge, activate sprayer rinsing, etc. Some of these functions can be controlled from the cab!

WATER CIRCUIT DIAGRAM - DELTIS 2

- Spraying
- Tank rinsing
- Incorporation

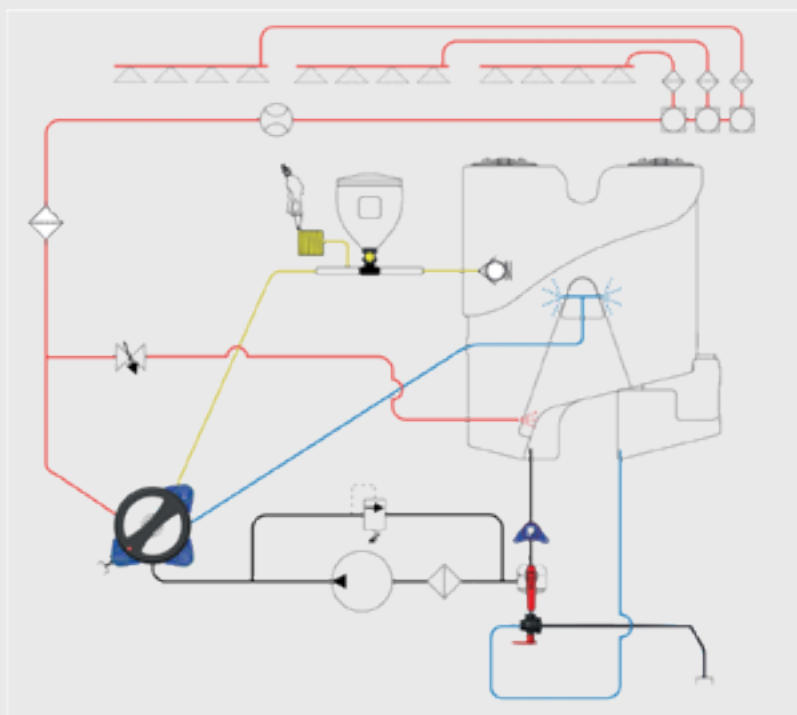

An accessible pump

The pump is positioned at the rear of the sprayer, offering easy access for maintenance, but above all you benefit from a long transmission which facilitates hitching.



THE KUHN +

Multifunction handwheels

Thanks to an ergonomic design, the valves are easily operated for a simple, trouble-free set-up. Reduce your handling by up to 50% for easier spraying!



Four levels of filtration


(for standard circulation, CCH and AUTOSPRAY)

At filling, suction, delivery and boom sections. All filters can be cleaned even when the sprayer tank is full.

DELTIS 2 1002 | 1302 | 1502

SAVE TIME, SPRAY FASTER

Easily navigate over bumps when spraying. The EQUILIBRA pendulum link suspension provides the boom with a three-dimensional shock absorption system.

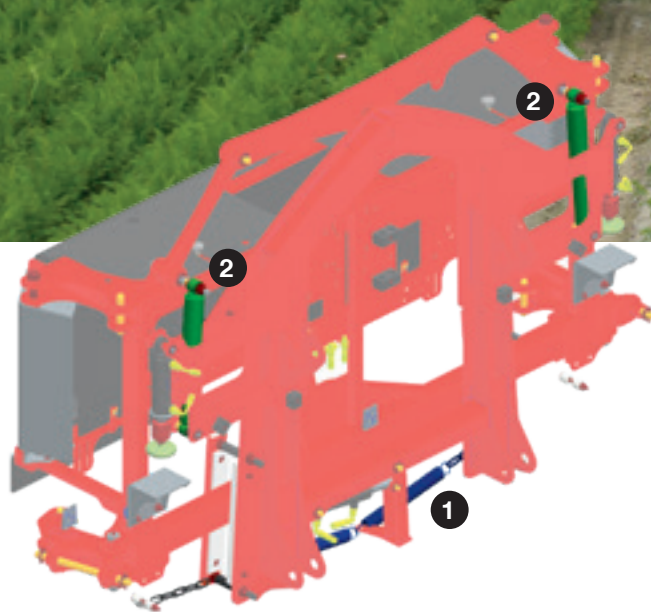

Natural stability...

On uneven terrain, the combination of a pendulum and link rods on the EQUILIBRA frame offers sufficient freedom of movement to keep the boom steady. The "pendulum" system dampens rotational movements and the link rods dampen the sideways shifts of the boom.

With EQUILIBRA, shock absorbers on each side of the frame limit the structure's movements.

...keeping the boom parallel!




Two springs on the underside of the EQUILIBRA frame keep the boom parallel to the chassis, with no action required from the driver, even when cornering.

A hydraulic tilt correction cylinder supplements the springs on particularly rough terrain.

TRAPEZIA suspension: simplicity in action!

The TRAPEZIA suspension is specially designed for MTS2, MTA2 and MTA3 booms, and is perfectly adapted for the DELTIS 2 sprayer. It includes an automatic mechanical tilt correction as standard.

- 1 2 stabilising link rods
- 2 Hydraulic tilt corrector (optional)
- 3 Automatic mechanical tilt corrector

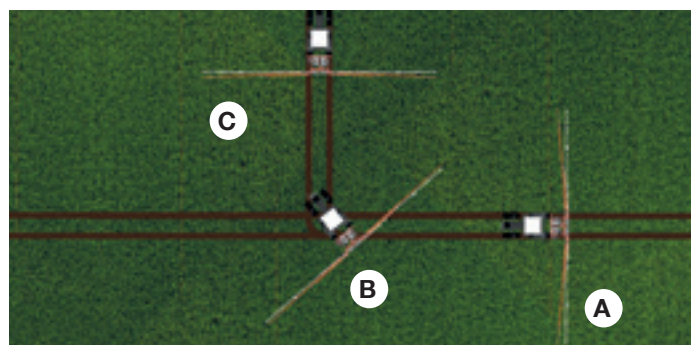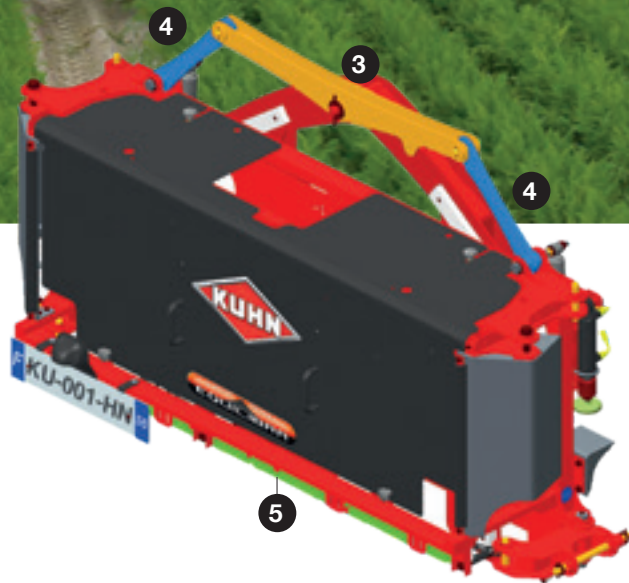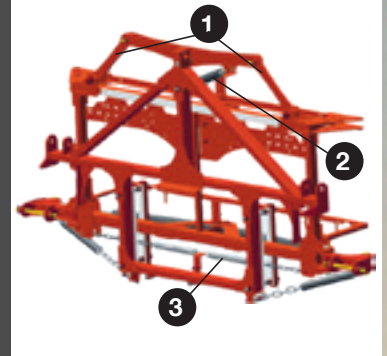

- 1 Automatic tilt corrector
- 2 Shock absorbers
- 3 Pendulum shaft
- 4 Two link rods
- 5 Independent anti-sway system

Boom shock absorption at the headlands!

Back-and-forth boom movements are highly damaging to the pivot points, especially during headland manoeuvres: Braking (A), Cornering (B), Acceleration (C).

The anti-sway system of the EQUILIBRA frame, consisting of 2 double cylinders, protects each side of the boom perfectly and independently in all these situations, ensuring prolonged service life for the frame, boom and sprayer.

DELTIS 2 1002 | 1302 | 1502

HIGH-PERFORMANCE BOOM FROM 15 TO 24 M

Steel or aluminium, TRAPEZIA or EQUILIBRA suspension frames, two or three arms... The range of booms available for DELTIS 2 sprayers meets every requirement! With nozzles spaced at 50 cm apart, these booms are available with a range of circulation options: standard, continuous hydraulic (CHC), continuous electric (CEC) or AUTOSPRAY.



Two-arm boom

MTS2

15 to 18 m

Equipped with the TRAPEZIA suspension frame, the MTS2 boom is made of steel. Steel offers a durable, corrosion-resistant solution thanks to KUHNS'S proven painting process. With its robust design, it has a number of advantages, such as nozzle protection across the entire width of the boom and a 3-dimensional retractable safety arm.



MTA2

15 to 24 m

MEA2

18 to 24 m

The MTA2 and MEA2 booms feature a simple structure. Aluminium booms are a durable, lightweight solution that's naturally corrosion-resistant. Fitted with TRAPEZIA (MTA2) or EQUILIBRA (MEA2) suspension, these booms offer numerous advantages such as articulations locked during operation by a self-locking cross brace system, stainless steel piping integrated into the structure and a 3-dimensional retractable safety arm. They also fold up into a compact position.



Diagonal folding

3-arm booms

MTA3

20 to 21 m

MEA3

20 to 21 m

The MTA3 and MEA3 booms fold diagonally to reduce the number of pivot points while maintaining optimum compactness. Aluminium booms are a durable, lightweight solution that's naturally corrosion-resistant. Fitted with TRAPEZIA (MTA3) or EQUILIBRA (MEA2) suspension, these booms offer numerous advantages such as nozzle protection across the entire width of the boom, stainless steel piping integrated into the structure and a 3-dimensional retractable safety arm.



MEA3 HD

24 m

The MEA3 HD boom is made of aluminium and equipped with EQUILIBRA suspension. Available in 24 m width, this boom has a robust structure to ensure long service life. All folding kinematics are horizontal, and the integration of the MEA3 HD boom is optimized for compact folding.

A BOOM THAT'S ALWAYS PROPERLY POSITIONED WITH BOOM ASSIST

BOOM ASSIST automatically adjusts height, tilt and variable geometries independently to keep the boom close to the target. You can drive the tractor without having to control the boom, since the technology controls the hydraulic boom functions! Using ultrasonic sensors, the BOOM ASSIST system keeps the boom at the correct height above the target regardless of the conditions: day and night, dry weather or fog, on vegetation or bare ground.



INNOVATIVE

HYBRID technology

BOOM ASSIST sensors are specially designed for spraying, keeping the boom at the right position in relation to the ground, the crops, or both at the same time in HYBRID mode. The patented HYBRID technology is integrated as standard into the sensors and enables the system to detect crop height. In situations of lodged or uneven crops, or fluctuating weather conditions, the system never loses its efficiency.

Easy to use

The main functions of the BOOM ASSIST are controlled directly from the sprayer working screen. Select the target height and start up the system with one click on the ISOBUS terminal. The system takes care of the rest!

When spraying starts and stops, the boom or variable geometries automatically lower or raise to a height preset by the user.



TWO VERSIONS TO MAKE SURE YOU FIND YOUR SOLUTION

The various versions of BOOM ASSIST available on the DELTIS 2 allow you to manage tilt (SLANT) or variable geometry (TOTAL). When spraying starts/stops, the boom automatically lowers/raises to a height preset by the user.



SLANT

Using 2 ultrasonic sensors, the system controls boom height and tilt correction.



TOTAL

Using 3 ultrasonic sensors, the system controls the height of the boom and the variable geometries.



CONTROL YOUR BOOM

Various hydraulic boom functions are available on DELTIS mounted sprayers: pendulum lock, synchronised inner arms, uncoupled outer arms, 4 independent arms, hydraulic tilt, variable geometries, etc. Hydraulic selectors or solenoid valves are used to control your boom.



Opt for simplicity

The function selectors are simple and economical. These are used to select the functions assigned to your hydraulic valve. Depending on the boom you require and the various options you select, 2-stage or independent opening of the outer arms, hydraulic tilt or variable geometries can be controlled directly from the tractor's control box.

CCI A3: a helping hand

You can see the functions of your machine to perform the right function at the right time using the CCI A3 auxiliary joystick. ISOBUS AUX-N certified by the AEF, it is compatible with all ISOBUS AUX-N certified machines. A beep sound and a vibration allow you to feel exactly what happens for each action.

Access more functions

The solenoid valves give you more options for unfolding the boom as well as access to different technologies such as BOOM ASSIST.

One single-acting valve with free return is all you need. Various control units are available to keep essential operational functions within easy reach.

CARRY MORE VOLUME

The combination of DELTIS 2 and the PF front-end sprayer provides a rated capacity of up to 3,000 litres! A single hose connects both sprayers: allowing for quick and easy hitching and rinsing operations. During the spraying operation, both tanks are controlled using the main unit of the DELTIS 2.



Functional finish

The PF front-mounted sprayer has a compact design, giving the operator excellent visibility of the front of the tractor. The needle gauge, easily visible from the cab, indicates the volume. Front and side LED lights are available in addition to the signalling lights for night spraying.



Clean water? One or two products?

The combination of the PF front-mounted sprayer unit and DELTIS 2 sprayer unit at the rear offers several options: a single total volume or 2 capacities with 2 different products. With the PF SELECT version, the PF sprayer A can also simply be used to supply clean water or liquid nitrogen.



Tank management

During spraying operations, no additional control unit is needed to manage the tanks. Simply press the PF logo on the terminal, and the pump will switch the suction from the rear tank to the front tank. This makes draining the tanks and balancing the load on the tractor effortless.


CONTINUOUS CIRCULATION: ACCURACY FROM START TO FINISH

Product circulation through the boom affects the quality of your spraying in many ways, in terms of priming, nozzle opening and closing, rinsing, clogging, etc. KUHN offers Continuous Hydraulic Circulation (CHC), Continuous Electric Circulation (CEC) or AUTOSPRAY to ensure high-quality spraying




CONTINUOUS HYDRAULIC CIRCULATION: CHC

With low-pressure continuous circulation, the boom is already primed before you begin spraying. The Continuous Hydraulic Circulation is not only a simple and efficient solution to prevent product loss at the start of your work in the field, but it also fully dilutes the sprayer's contents before you begin spraying.

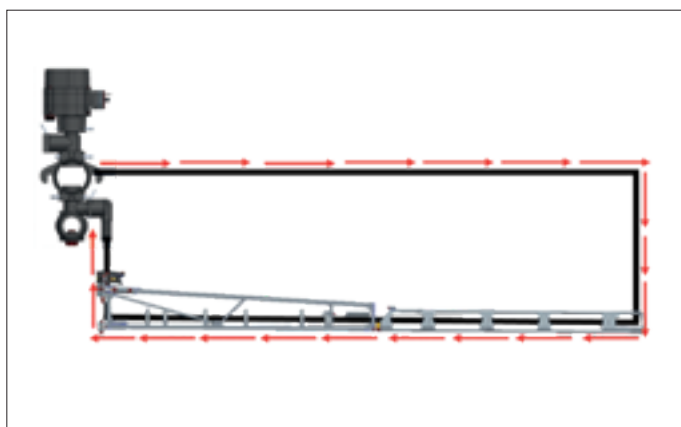

Sprayer OFF

When spraying is stopped, each section of the boom continues to be fed at low pressure and the spray solution flows back to the tank. This means fewer clogging incidents in your boom and more effective priming!

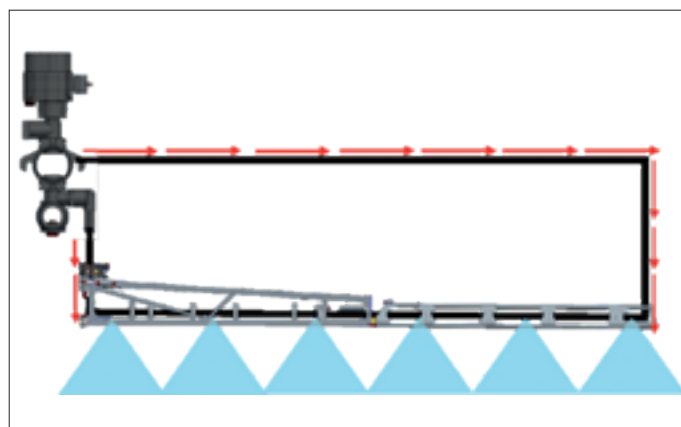


Sprayer ON

When spraying is activated, the boom is fed from both sides. In this way, each section maintains a well-balanced supply.

CONTINUOUS ELECTRIC CIRCULATION: CEC

Increasing the number of sections on the machine will reduce the overlap of your sprayer at the end of the field. KUHN sprayers equipped with the GPS-controlled individual nozzle shut-off technology will not spray the same area twice.

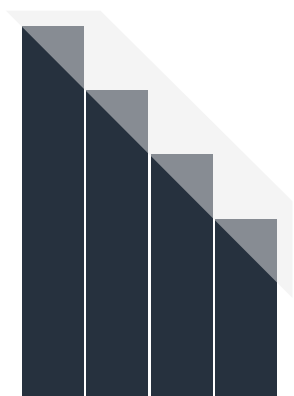


24 nozzles in 4 sections of
3 m controlled by GPS

18 m²
of overlap with a peak
at 45°

36 m²
for a 24 m boom with
8 sections

**INDIVIDUAL
SHUT-OFF**

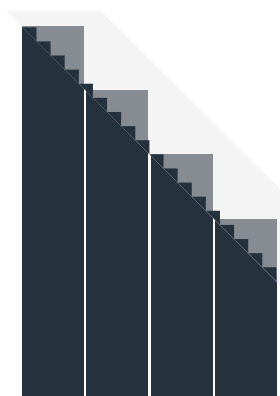


24 nozzles individually
controlled by GPS

3 m²
of overlap with a peak
at 45°


6 m²
for a 24 m boom with
48 nozzles

**6 X
LESS
OVERLAP**

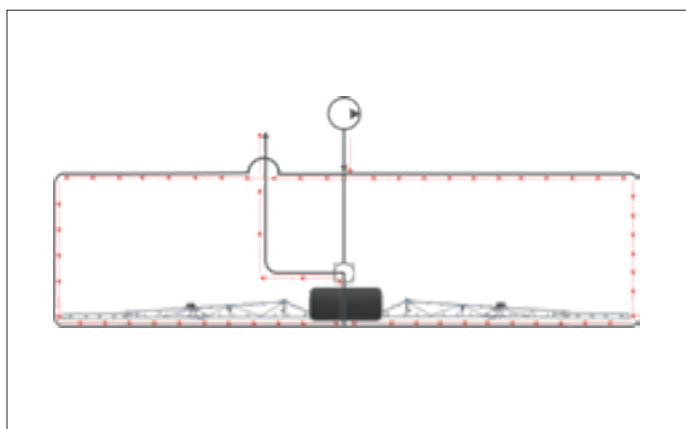

Sprayer OFF

When spraying is stopped, the boom continues to be fed at high pressure and the spraying solution flows back to the tank. This means fewer clogging incidents in your boom and instant priming!

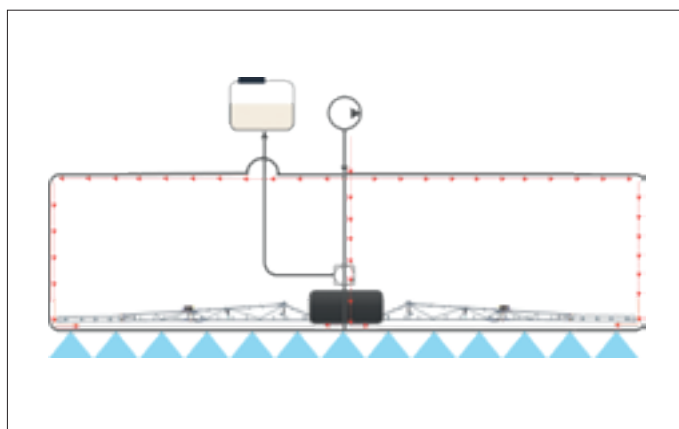

Sprayer ON

The boom is fed at several points to ensure a well-balanced supply of the spraying solution without flowing back into the tank. The spray opens quickly and independently of pressure.

AUTOSPRAY: CHOOSE YOUR DROPLET SIZE AND GO!

During spraying operations, droplet size management is a key component in accurately applying products. Achieving higher outputs means driving faster, which is not always consistent with maintaining good spray quality. Climatic conditions, and the fact that they could change during operations, must also be considered. In order to maintain excellent spray quality, Kuhn introduces the AUTOSPRAY spraying system.



Product type	Required droplet size			Average droplet size (MVD)	Agronomic recommendations
Contact chemical	VF	F		<231 µm	High risk of drift, minimal wind and high hydrometry
Systemic chemical	M	C	VC	231-484 µm	- Less sensitive to drift and evaporation - Sensitive to leaching
Liquid nitrogen	XC	UC		>484 µm	Very low risk of drift



Droplet size: an important agronomic decision

Droplet size is most often expressed according to the MVD (Median Volume Diameter) in µm.

Across various nozzle models available on the market, droplet size may vary depending on the spray pressure.

Generally, higher pressure results in finer droplets. Most nozzle manufacturers today indicate the droplet size obtained based on the pressure applied.

20 pulses per second

To ensure excellent coverage, AUTOSPRAY's electric nozzle bodies operate alternately at a frequency of 20 Hz, equivalent to 20 pulses per second. This makes for precise spraying that's also highly responsive!

Easy to use

Spraying is a breeze with the ISOBUS terminal. Droplet size can be activated or deactivated with a simple click for optimal spray quality.

By controlling the application rate and the droplet size, all systems work together to achieve precision spraying.




SWITCH TO VARIABLE RATE PRECISION SPRAYING


The AUTOSPRAY smart nozzle bodies are equipped with PWM (Pulse Width Modulation) technology, enabling 1 nozzle to perform the work of 4 consecutive nozzles while maintaining a constant pressure over a wide range of speeds, ensuring consistent droplet size! AUTOSPRAY is more than an automatic nozzle change; it enables continuous adjustment of the spray for consistent and uniform treatment in terms of both quantity and quality.



With AUTOSPRAY: 1 nozzle for a uniform result

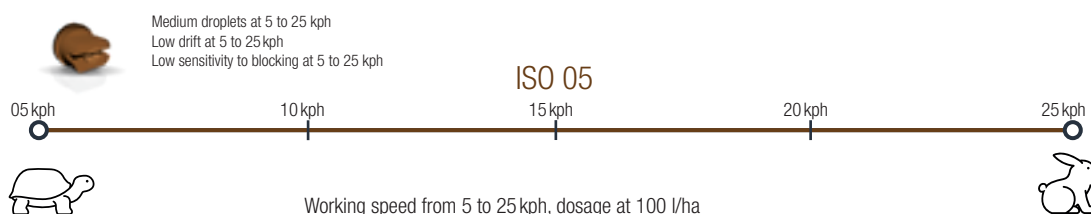


Multiple nozzle bodies with nozzle selection: 4 nozzles required, producing an uneven result

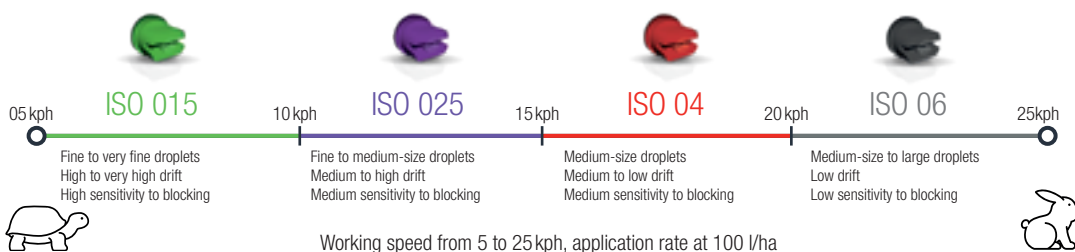

Application rate modulation for each section

Farmers have access to increasingly accurate agronomic data. AUTOSPRAY technology allows you to adjust the application rate on different sections based on your data to ensure sustainable quantities of inputs, (spraying or liquid fertilisation).

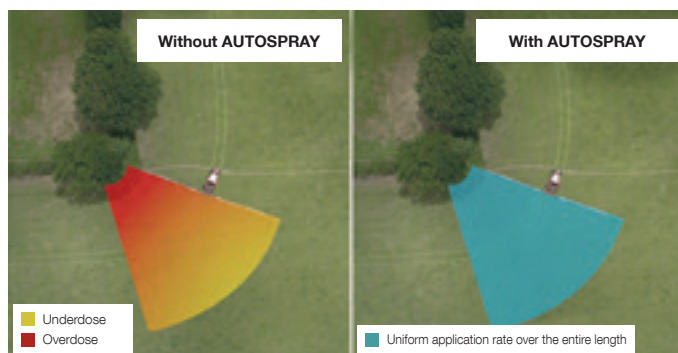

Compensation on turns

Another potential source of spraying inaccuracies occurs during turns, where the booms may cover a larger area on the outside compared to the inside. The AUTOSPRAY system can also compensate for this dosing issue with the PWM technology, which controls how long the nozzles on inside and outside of the boom are open.

DELTIS 2 1002 | 1302 | 1502

SPRAYER RINSING MADE EASY

Once you've finished spraying, it's important to dilute any residual spraying solution and rinse your sprayer. These operations can be carried out in the field or on the farm, depending on the local laws. KUHN has optimised its sprayers to ensure effective dilution and rinsing!



Rinsing made easy with MANUSET

During rinsing, simply rotate the delivery valve 360 to deliver clean water into all sprayer circuits.



Semi-automated operations with DILUSET+

Thanks to the DILUSET+, you can start rinsing your machine from the tractor cab. You can rinse either the entire machine or just the boom. You'll be guided through every stage of the process from your terminal. The rinsing circuit is also displayed on the sprayer working screen.




Optimal main tank rinsing

Equipped with three 360° rotary washers, the inside walls of the main tank are rinsed efficiently at the end of your spraying operations.

External cleaning kit

Rinse the outside of the machine with the exterior cleaning kit (automatic 15 m hose reel and spot lance). Clean the machine in the field to return to the farm ready for immediate use with another product, in full compliance with local laws.

KUHN ISOBUS SOLUTIONS: REAP THE BENEFITS OF THE ISOBUS COMPATIBILITY ON THE DELTIS 2 SPRAYER!



CCI 800 AND 1200: ONE TERMINAL FOR ALL KUHN MACHINES

CCI 800 and 1200 ISOBUS terminals are AEF-certified. They focus on three priorities: performance, visibility and flexibility. Control your machines intuitively with a large antiglare touchscreen. Being capable of simultaneously displaying different essential information, connecting to a joystick and a camera, these terminals are highly versatile.



CCI 800: The compact ISOBUS terminal

The 8"/20.3cm screen displays the main machine and mini-views on the side. Click on the mini-view you wish to enlarge.



CCI 1200: innovative, panoramic, high performance

With the 12.1"/30.5cm screen, all essential information is displayed. Different display formats are possible: mini-view / maxi-view / double UT.

A MULTITUDE OF APPLICATIONS COME AS STANDARD



TECU
Recover basic tractor information



CONTROL
Control your tasks and your ISO-XLM documentation



CONVERT
Connect to your biomass sensor



CAMERA
Connect a camera and display live images



HELP SYSTEM
The assistance you need

LOOK AT THE CCI APPLICATIONS



SECTION CONTROL
Automatic seeding management by GPS



RATE CONTROL
Application rate modulation by GPS (SHP and ISOXML) of several products (e.g. seeding + fertilisation)



DATA TRANSFER
Data import/export via agrirouter




PARALLEL TRACKING
Guidance + tramlining assistance by GPS with the Tramline Control function

ISOCLICK control unit

This control unit allows you to maintain control of the machine's main functions while working. Even at high speed, you're able to easily control sections manually, or perfectly manage the machine's hydraulic functions.



YOUR CCI 800 AND 1200 TERMINALS CONNECT TO THE INTERNET

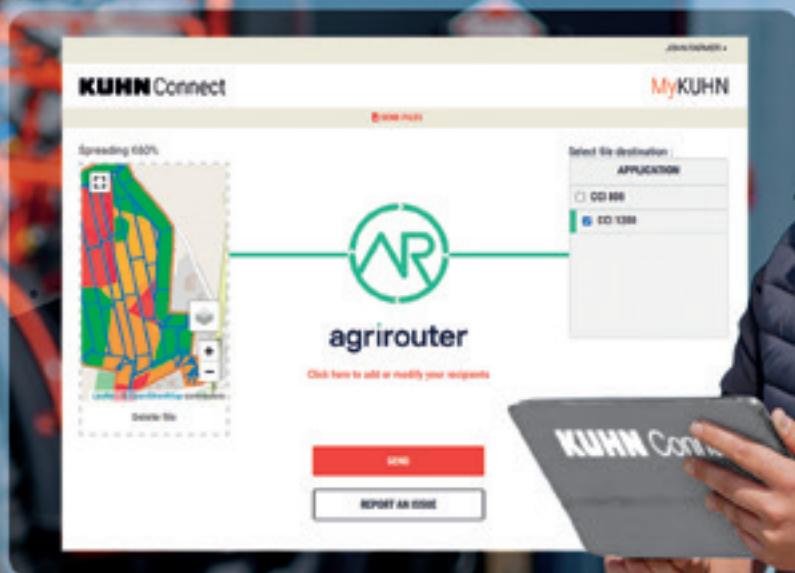

MyKUHN

Find the **KUHN CCI Connect** packs
in your MyKUHN space!
<https://mykuhn.kuhn.com/>



Online CCI Update

Automatic update of your CCI terminal!
The latest functionalities are automatically installed.



CCI Remote View

Need help? Need advice?
Share your terminal screen for live support!
*On your MyKUHN account.
With your KUHN partner.*



KUHN EasyTransfer

Receive your prescription maps directly on your terminal!
And when you're finished spraying, export your tasks.



Ready for agrirouter

Communicate with all software connected to agrirouter!
agrirouter -> multi-brand compatible.

NUMEROUS ACCESSORIES



Reversing camera for CCI terminal

Installed on the boom suspension frame, a reversing camera is available to improve visibility to the rear of the machine, making backing up easier. The camera provides a clear view, helping to avoid obstacles and ensure safe driving.



Worklights

To make the most of optimum spraying conditions (low temperature and high hygrometry), night work is possible. LED lamps are positioned under the boom for visual spraying control, even at night.



Off-centre end nozzles

To increase the spraying width, an asymmetrical nozzle can be fitted on the boom end. These nozzles are electrically-controlled from the cab. Either on just one side of the boom or on both sides, these nozzles will be very useful in case of irregular field boundaries or if you wish to treat along the field edges.



KUHN PARTS



Designed and manufactured to rival time. KUHN foundries and forge as well as a high-level manufacturing process allow the production of spare parts to defy time. You can truly rely on our know-how and our genuine parts. Farmers benefit from our client support and logistics services via any KUHN PARTS warehouse, which provide quick and reliable repair solutions in cooperation with your nearest authorized KUHN dealer.



Technical specifications


DELTIS 2

	MTS2	MTA2 / MEA2	MTA3 / MEA3	MEA3 HD
Boom width (m)	15 to 18	15 to 24	20 to 21	24
Boom material	Steel	Aluminium		
Boom lifting	OPTILIFT parallelogram			
Boom suspension	TRAPEZIA or EQUILIBRA			
Ground tracking system	BOOM ASSIST SLANT or TOTAL			
Rated tank capacity (L)	1000 - 1300 - 1500			
Actual tank capacity (L)	1130 - 1405 - 1620			
Rinsing tank capacity (L)	170			
Tank material	Polyethylene			
Pumps	PM120 / PM170 / PM200 diaphragm pumps			
Pump flow rate (l/min)	120 - 170 - 200			
Max. pressure (bar)	7			
Circulation	Standard / CCH / CCE / AUTOSPRAY			
Control system	MANUSET or DILUSET+			
Regulation	BUSCAN or ISOBUS			
Overall width (m) - A	2,55			2,6
Maximum transport height (m) (DELTIS 1302) - B	3.20 (15 m)	3.50 (21 m)	3.35 (21 m)	3.65 (24 m)
Empty weight (kg) (DELTIS 1302)	1055 (15 m)	1050 (21 m)	1100 (21 m)	1330 (24 m)

Technical specifications may differ depending on the configuration and settings of the machine.

KUHN SERVICES*

KUHN sos order - Express spare parts service, 24/7**
KUHN protect+ - The choice of professionals!
KUHN i tech - For ever quicker repairs!
KUHN finance - Invest rationally!

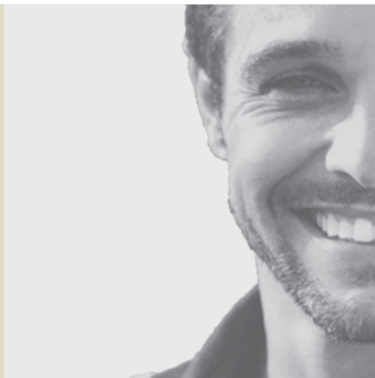

* Not all services are available in all countries. ** except January 1, May 1 and December 25

MyKUHNN

THE LINK TO MY SUCCESS!

MyKUHNN is your on-line customer space. Sign up now and discover how the exclusive services offered by MyKUHNN will facilitate the management of your fleet of KUHN machines and terminals as well as help you maximize their performance. Once identified, on computer, smartphone or tablet, you will have access to parts catalogs, technical documentation and numerous connected services.



Discover the entire range of KUHN sprayers.



1. OPTIS/OMNIS - 2. DELTIS 2 - 3. ALTIS 2 + PF - 4. LEXIS - 5. METRIS 2 - 6. ARTEC F40 EVO

KUHN SAS - 4 Impasse des Fabriques - BP 50060 - F-67706 Saverne CEDEX - FRANCE
KUHN NORTH AMERICA, INC. - 1501 West Seventh Avenue - Brodhead, WI 53520 - USA
KUHN FARM MACHINERY PTY. LTD - 313-325 Foleys Road - Deer Park, VIC, 3023 - AUSTRALIA
KUHN FARM MACHINERY (U.K.) LTD - Stafford Park 7 - GB TELFORD/ SHROPS TF3 3BQ

To find your nearest KUHN dealer,
visit our website www.kuhn.com

Information given in this document is only for information purposes and is non-contractual. Our machines are in compliance with regulations in force in the country of delivery. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices **must** be in position in accordance with the requirements indicated in the operator's manuals and pre-delivery instructions. RESPECT THE ROAD REGULATIONS IN FORCE AS WELL AS the tractor gross vehicle weight rating, its lift capacity and maximum load per axle and tyres. The tractor front AXLE load must always comply with the regulations of the country of delivery (In Europe, it must reach minimum 20 % of the tractor net weight). We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

To protect the environment, this leaflet is printed on chlorine-free paper.
Printed in France - GP0071 EN - 06.24 - Copyright 2024 KUHN

